

TRIMLESS

CEILING CONNECTION

BROKIS®

TRIMLESS is a new solution for BROKIS collections that eliminates the need for a conventional ceiling canopy and simplifies installation in drywall ceilings. It gives ceiling installations a clean, minimalistic appearance and provides a new degree of variability in creating original lighting compositions.

All versions suitable for drywall thicknesses of 11 mm to 18 mm. The ideal drywall thickness is 12.5 mm (clamp depth depends on the thickness of the drywall – the thicker the material, the deeper the clamp sits within the component).


Maximum load capacity varies depending on the type of ceiling sheet material and grid system. The maximum capacity of the component will exceed the capacity of the cables/ropes and drywall.

3 versions (cable, 12 mm rope, 16 mm rope)


3 installation tools, one for each version

3 installation holes

Version for cable: diameter 58–59 mm

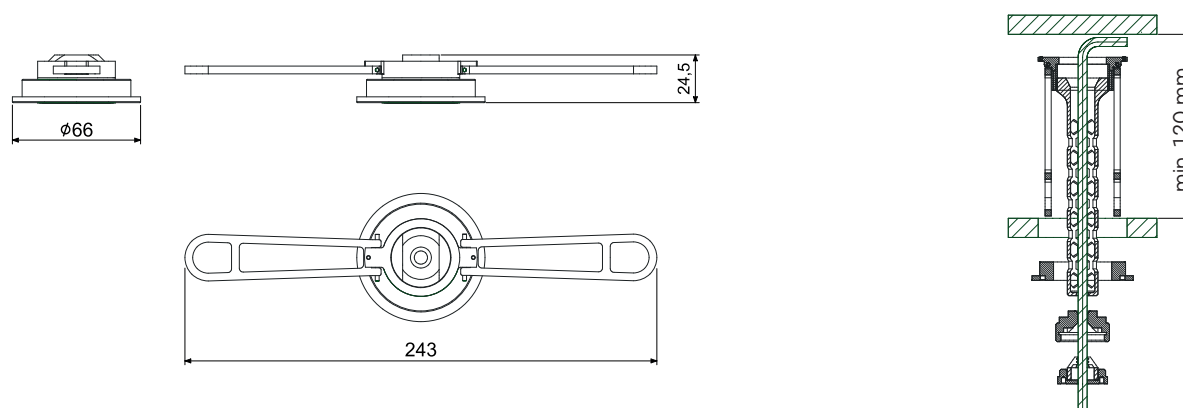

Version for 12 mm rope: diameter 63–64 mm

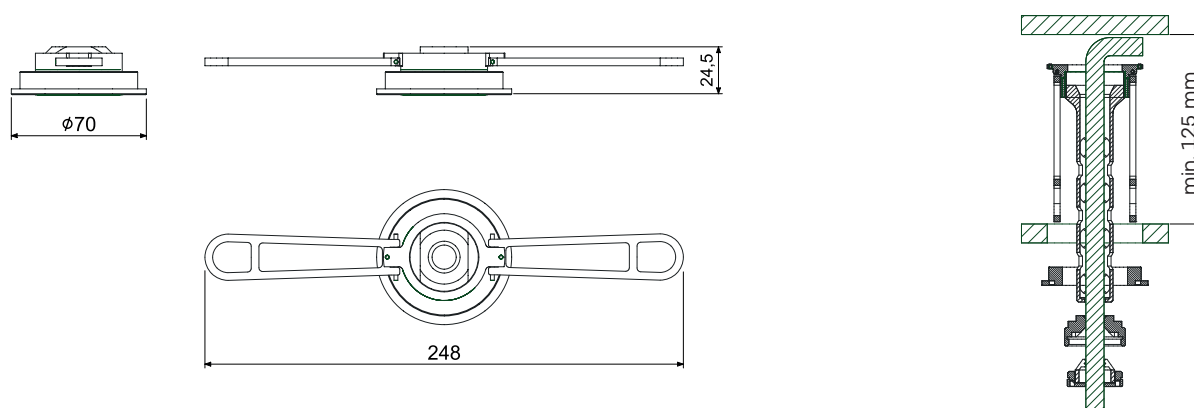

BROKIS®


BROKIS s.r.o.
Sídliště Janštejn 39
588 52 Horní Dubenky
Czech Republic
+420 567 211 517
info@brokis.cz
brokis.cz

BROKIS REGISTERED OFFICE
Španielova 1315/25
Praha 6, 163 00
Czech Republic
ID: 64940799
VAT: CZ64940799



TRIMLESS VIDEO

Version for 16 mm rope: diameter 68–69 mm

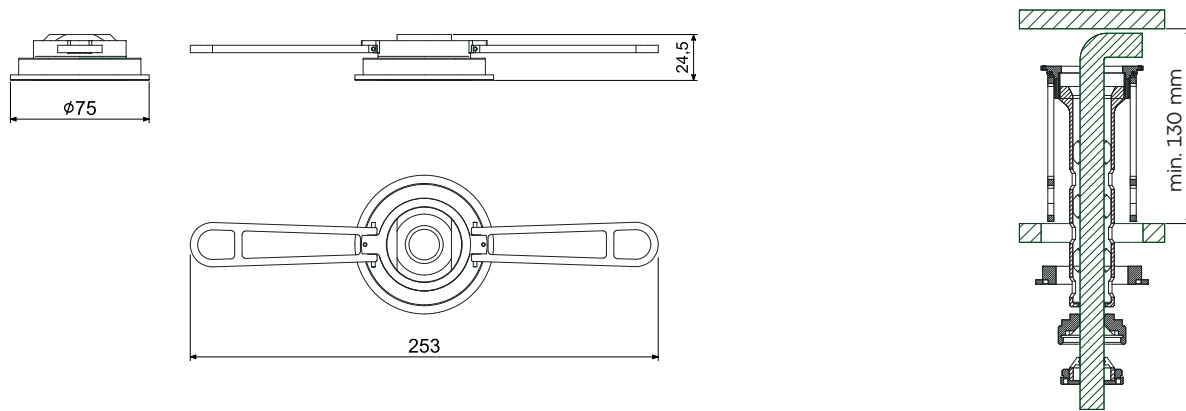


Materials and finishes/colour

fixture + cover + clamp arms – galvanized steel
 clamp – POM (polyoxymethyl) + Dural
 anticorrosion finish on all parts


The front side of the clamp and cover are powder coated in black (RAL 9005) + white texture (RAL 9003).

Installation tools


Version for cable: diameter 58–59 mm

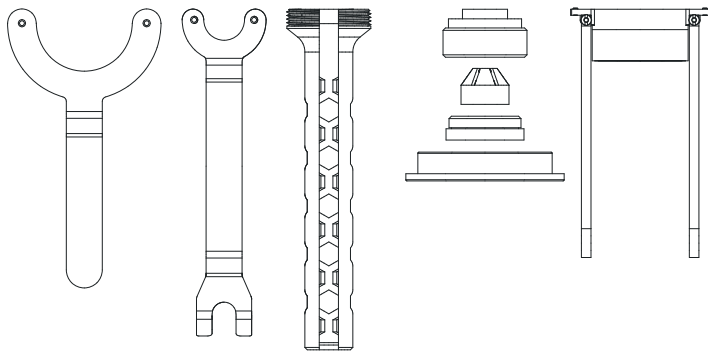

Version for 12 mm rope: diameter 63–64 mm

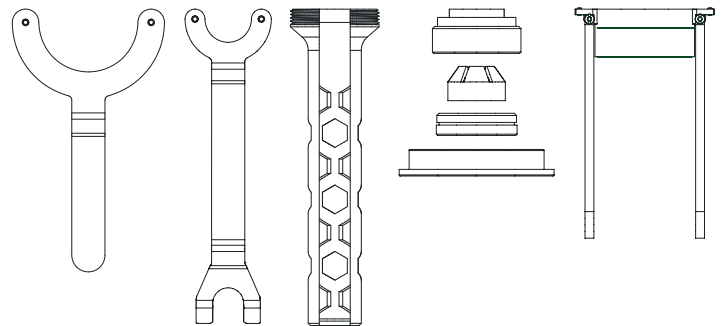

Version for 16 mm rope: diameter 68–69 mm

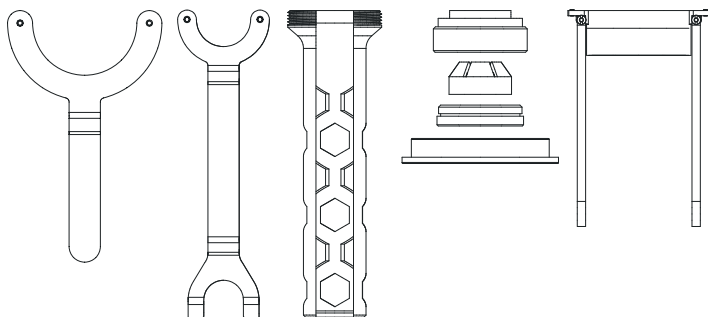

BROKIS®

BROKIS s.r.o.
 Sídliště Janštejn 39
 588 52 Horní Dubenky
 Czech Republic
 +420 567 211 517
 info@brokis.cz
 brokis.cz

BROKIS REGISTERED OFFICE
 Španielova 1315/25
 Praha 6, 163 00
 Czech Republic

ID: 64940799
 VAT: CZ64940799



TRIMLESS VIDEO