


## Package contents

---

Name: **MEMORY SET PC1001**  
**ceiling light**

∅1100 × 20



**Components included with unit:** 1 ceiling canopy with terminal connectors, 3 metal light bodies, 3 glass shades, 3 metal end caps, 9 screws for securing metal bodies to ceiling canopy, 1 installation manual, 1 pair cotton gloves

## Installation

---

**Installation may be carried out by a qualified electrician only. The manufacturer assumes no liability for damage resulting from failure to adhere to the steps described in this manual. With regard for various types of ceiling materials and their age, we recommend consulting installation with a qualified expert. The manufacturer assumes no liability for incorrect installation or defects in the material to which the ceiling canopy is mounted. Use anchors of sufficient strength (not included).**

**When unpacking the light, do so with regard for its material composition.**

**Prior to installation, switch off power at the main circuit panel.**

1. Position the ceiling canopy on the ceiling and mark the drill holes for the anchors. Set the ceiling canopy aside. Drill the holes and insert sufficiently strong anchors.
  2. Lift the ceiling canopy and align the holes with the anchors in the ceiling. Connect the ceiling canopy to the building wiring, including the ground wire. Using screws, secure the ceiling canopy to the anchors in the ceiling.
  3. Position the metal light bodies onto the mounts cut in the ceiling canopy and secure them using the provided screws.
  4. Connect the individual lights to the ceiling canopy wiring, including the ground wire, which is a component of the light body.  
Install the light sources (bulb E27 – not included with unit).
  5. Thread the string hanging from the metal light body first through the large opening and then the small opening in the glass shade. Attach the glass shade to the metal light body so that the screws in the light body recede into the grooves in the bracket on the glass shade. Turn the glass shade clockwise until it is securely attached to the metal light body. If the process of mounting the glass shade onto the metal light body does not go smoothly, begin again. Then, thread the string through the metal pull and tie it off with a knot.
- 

Restore power at the main circuit panel and ensure that the light works properly.

**Prior to shipping, the functionality of each light and its components is thoroughly tested. The manufacturer assumes no liability for the mishandling of products.**

**Installation time: 1 hour (3 people)**

---


**TECHNICAL SUPPORT**  
info@brokis.cz  
www.brokis.cz

**OFFICE**  
Španielova 1315/25, Praha Řepy, 16300, Czech Republic  
IČO 64940799, DIČ CZ64940799


**SHOWROOM AND FACTORY**  
Sídliště Janštejn 39, Horní Dubenky, 588 52,  
Czech Republic




1.

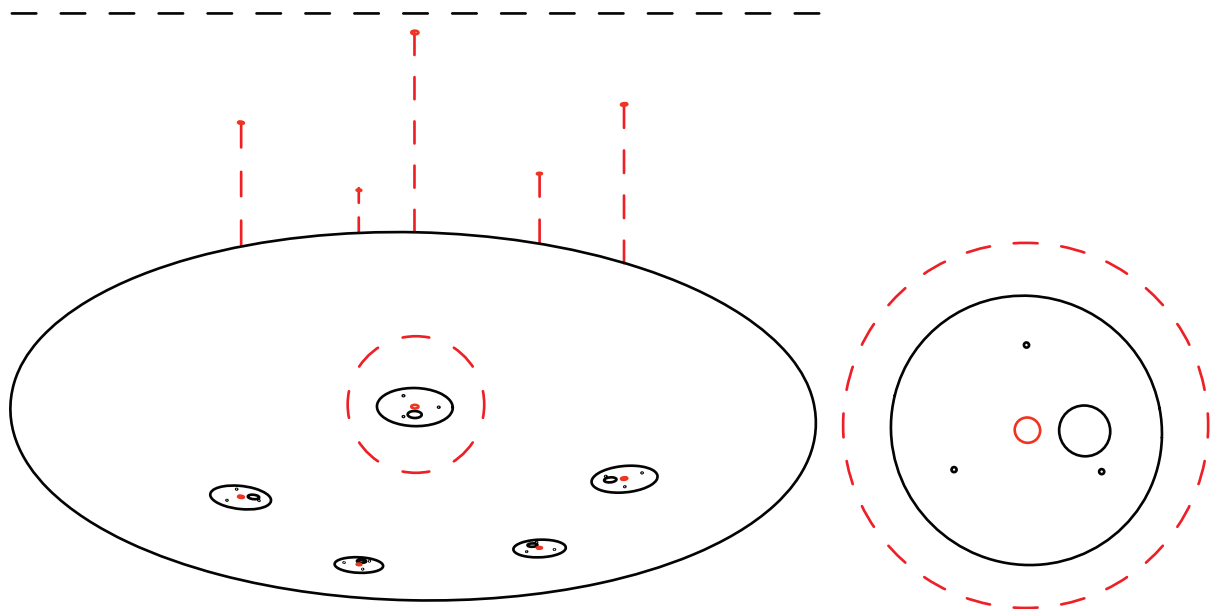

2.

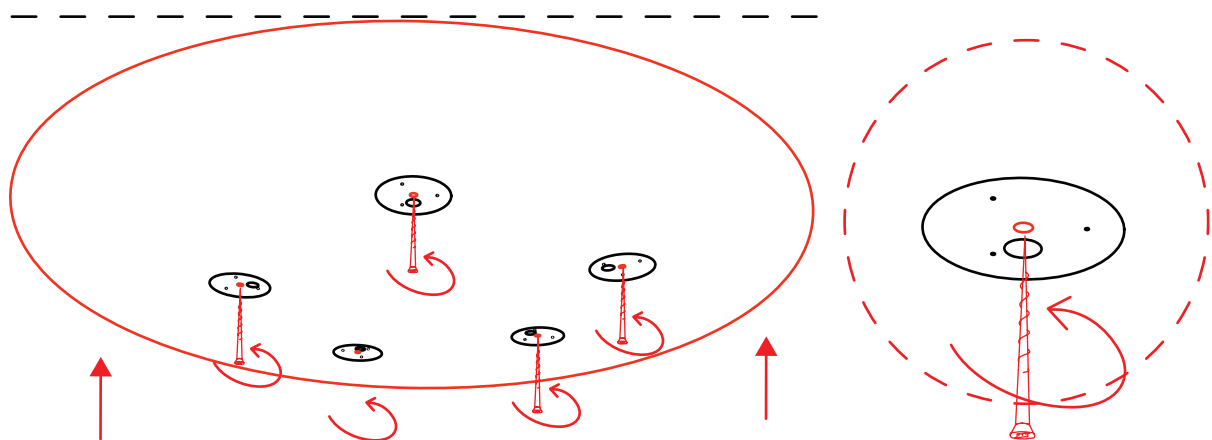

3.

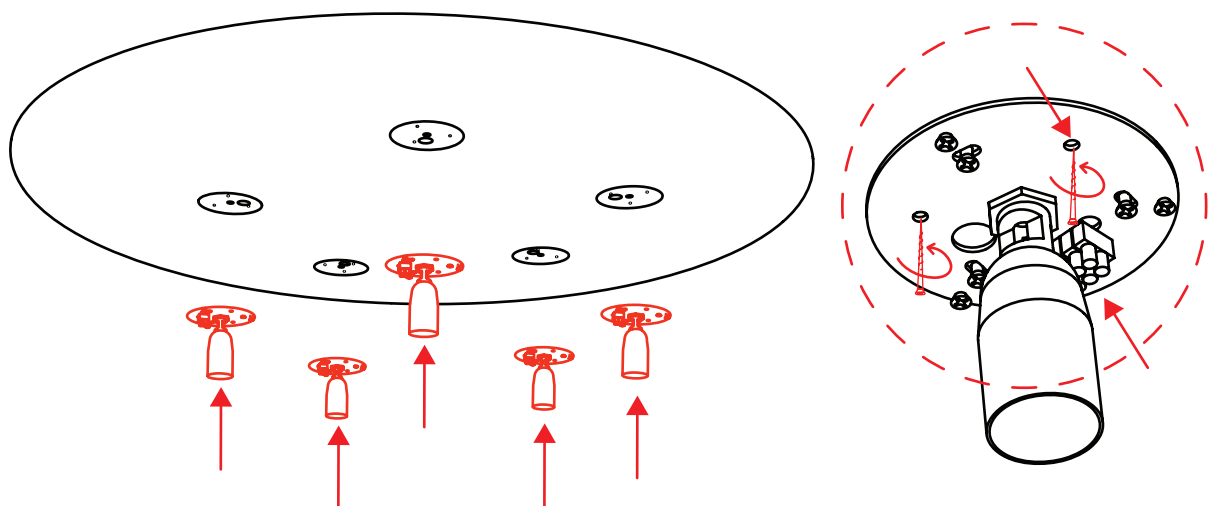


**TECHNICAL SUPPORT**  
info@brokis.cz  
www.brokis.cz

**OFFICE**  
Španielova 1315/25, Praha Řepy, 16300, Czech Republic  
IČO 64940799, DIČ CZ64940799


**SHOWROOM AND FACTORY**  
Sídliště Janštejn 39, Horní Dubenky, 588 52,  
Czech Republic



4.

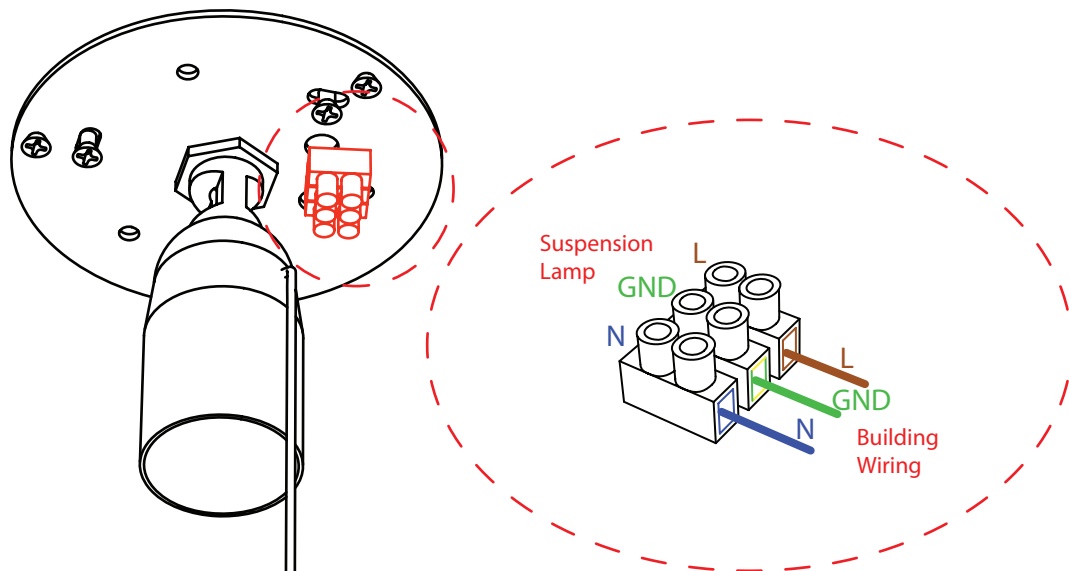

5.

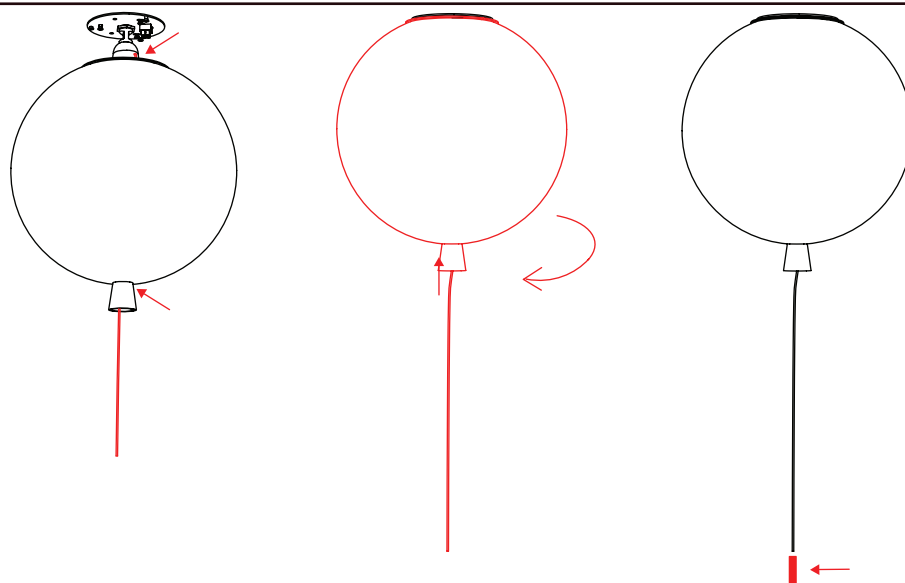


## Obsah balení

---

Název: **MEMORY SET PC1001**  
**stropní svítidlo**

Ø 1100 × 20



**Komponenty které jsou součástí balení:** 1x baldachýn s přípojovacími svorkovnicemi, 3x kovová montura, 3x skleněné stínítko, 3x kovová koncovka, 9x vrut pro upevnění kovové montury k baldachýnu, 1x manuál, 1x rukavice

## Instalační manuál

---

**Montáž smí provádět pouze pracovník s odbornou elektrotechnickou kvalifikací. Při nedodržení montážního návodu výrobce neručí za případné vzniklé škody! S ohledem na různý typ i stáří materiálů stropů doporučujeme montáž konzultovat s odborníkem. Výrobce svítidla neodpovídá za nevhodně zvolený pracovní postup či vady materiálu, do kterého se nosný komponent instaluje. Zvolte dostatečně silné kotevní prvky (není součástí balení).**

**Při vybalování nakládejte se svítidlem s ohledem na jeho materiálové složení.**

**Před montáží vypněte příslušným jističem přívod elektrického napětí.**


1. Přiložte baldachýn ke stropu a nazaňte body pro vyvrtání kotevních prvků. Odložte baldachýn a připravte kotevní otvory a dostatečně silné kotevní prvky (hmoždinky).
2. Přidržte baldachýn u stropu tak, aby kotvicí otvory v baldachýnu byly přímo na kotvicích pvcích. Zřídte elektrické propojení baldachýnu s elektroinstalací, a to včetně zemního kabelu. Pomocí vrutů připevněte baldachýn do kotevních prvků ve stropě.
3. Pomocí vrutů (jsou součástí balení) připevněte kovovou monturu svítidla do vyfrézovaných pozic, předpřipravených na pohledové ploše baldachýnu.
4. Zřídte elektrické propojení svítidel s elektroinstalací baldachýnu, a to včetně zemního kabelu, který je součástí montury. Instalujte světelný zdroj (E27 - není součástí balení).
5. Provázek visící z kovové montury protáhněte nejprve velkým a následně malým otvorem skleněného stínidla. Skleněné stínidlo nasadte na kovovou monturu na stropě tak, aby šrouby montury na baldachýnu zapadly do drážek v montuře stínidla. Ve směru hodinových ručiček pootočte skleněnou částí, až dojde k bezpečnému zajištění v montuře svítidla. Pokud zajištění neproběhne hladce, opakujte celý postup nasazování stínidla. Provlékněte provázek kovovou úchytkou a zajistěte uzlíkem.

Zapněte příslušný jistič a ověřte funkčnost svítidla.


**U každého svítidla včetně jeho komponentů je před expedicí důkladně zkontrolována jeho funkčnost. Výrobce nenes odpovědnost za nesprávné zacházení s produkty.**

**Doba instalace: 1h (3 osoby)**


1.

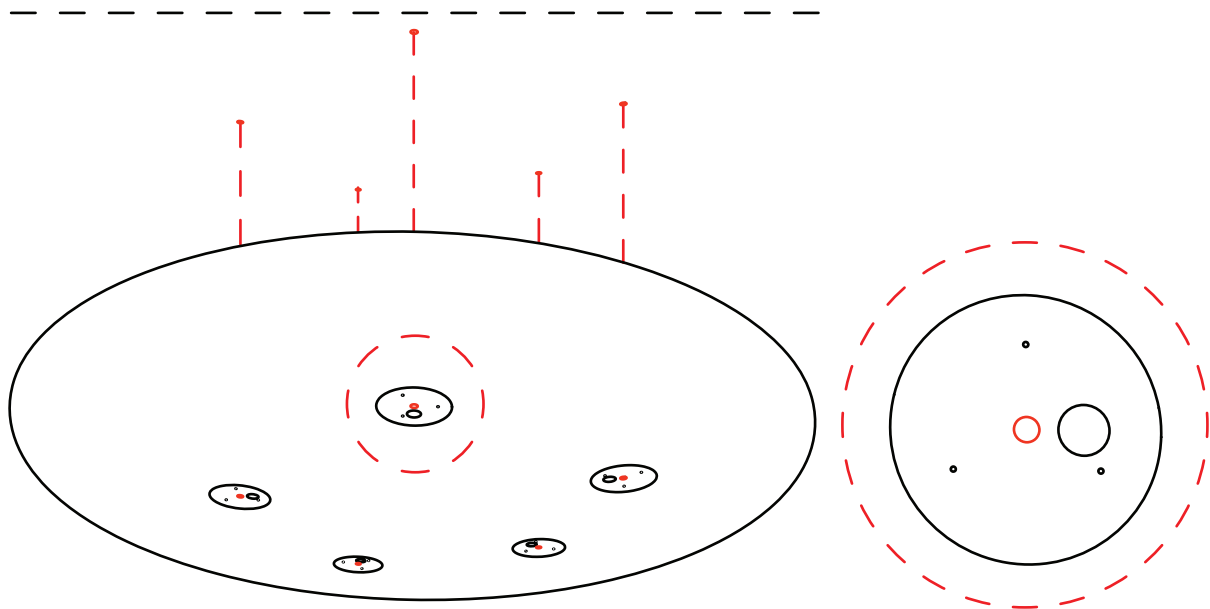


2.

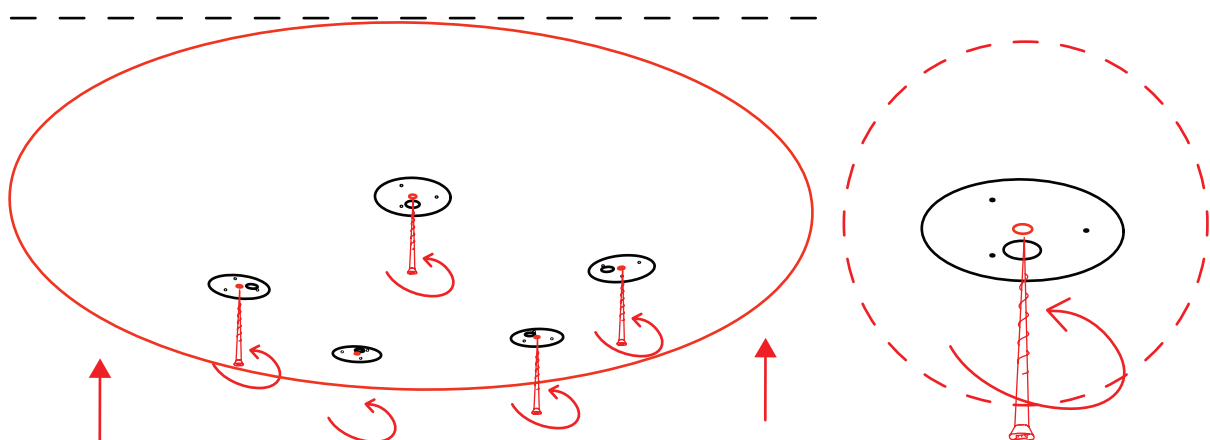

3.

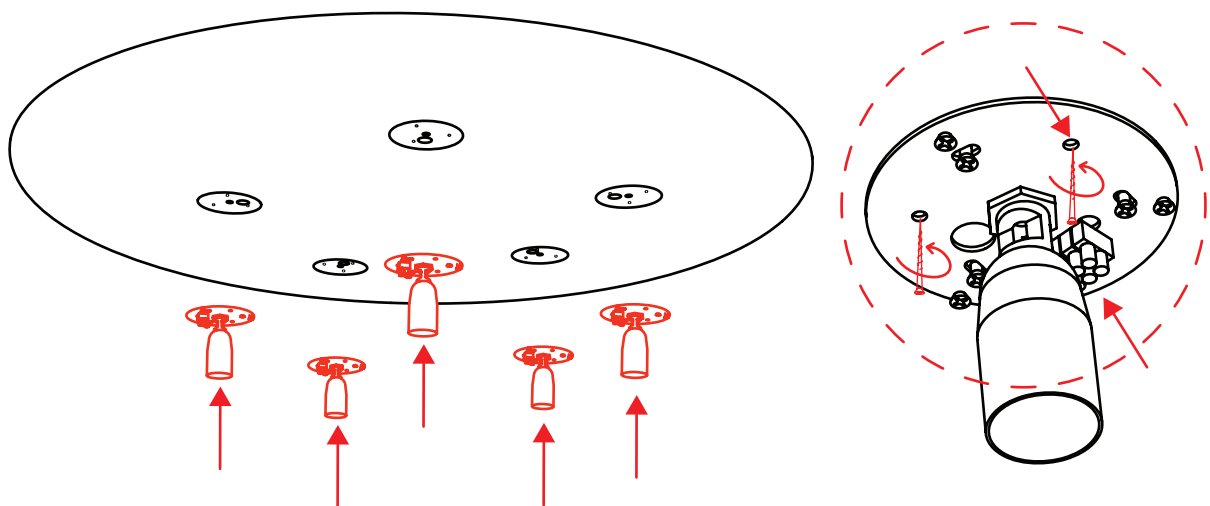

4.

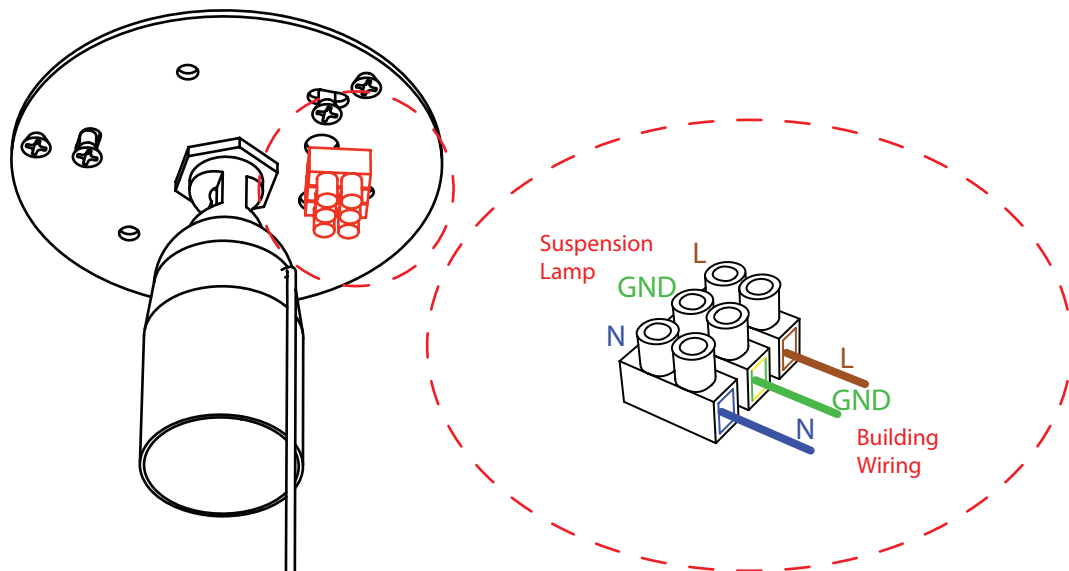

5.

